


**G3FM** THREE-PHASE MOTOR REDUCER WITH FLANGE

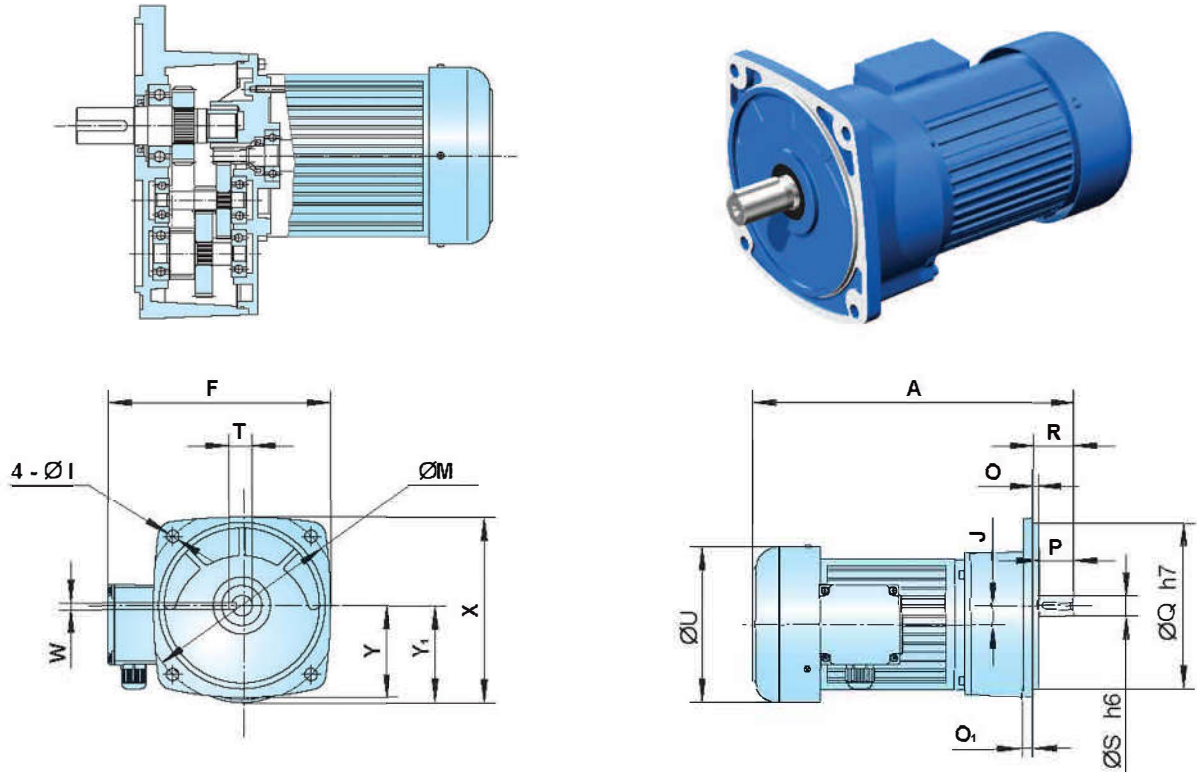

motor rotate speed 1400 r / min

power kW	output shaft	ratio	primary outline and dimension-mount																	
			A		F	I	J	M	O	O <sub>1</sub>	P	Q	R	S	T	U	W	X	Y	Y <sub>1</sub>
			standard	brake																
0.1	Ø18	5, 10, 15, 20, 25, 30, 40, 50	236	270	192.5	11	16.5	170	4	10	30	145	35	18	20.5	129	6	157	80	81
	Ø22	60, 80, 100, 120, 160, 200	262	296	197.5	11	19	185	4	12	40	148	47	22	24.5	129	6	171.5	89.5	83.5
0.2	Ø18	5, 10, 15, 20, 25	267	270	192.5	11	16.5	170	4	10	30	145	35	18	20.5	129	6	161	80	81
	Ø22	30, 40, 50, 60, 80, 100	293	296	197.5	11	19	185	4	12	40	148	47	22	24.5	129	6	171.5	89.5	83.5
0.4	Ø28	100, 120, 160, 200	306	309.5	208.5	11	23.5	215	4	15	45	170	50	28	31	129	8	198.5	105.5	88
	Ø22	5, 10, 15, 20, 25	314	324.5	204	11	19	185	4	12	40	148	47	22	24.5	139	6	171.5	89.5	88.5
	Ø28	30, 40, 50, 60, 80, 100	330	337.5	215	11	23.5	215	4	15	45	170	50	28	31	139	8	198.5	105.5	93
0.75	Ø32	100, 120, 160, 200	349	357	229.5	13	28.5	250	4	15	55	180	60	32	35	139	10	234	126	98
	Ø28	5, 10, 15, 20, 25	350.5	343.5	227.5	11	23.5	215	4	15	45	170	50	28	31	159	8	198.5	105.5	103
	Ø32	30, 40, 50, 60, 80, 100	379.5	387	242	13	28.5	250	4	15	55	180	60	32	35	159	10	234	126	108
1.5	Ø40	100, 120, 160, 200	401.5	408.5	270	18	34	310	5	18	65	230	71	40	43	185	12	284	149	126.5
	Ø32	5, 10, 15, 20, 25	420.5	441	254	13	28.5	250	5	15	55	180	60	32	35	185	10	234	126	121
	Ø40	30, 40, 50, 60, 80, 100	457.5	478	270	18	34	310	5	18	65	230	71	40	43	185	12	284	149	126.5
2.2	Ø50	100, 120, 160, 200	485.5	506	300	22	40	360	5	25	75	270	83	50	53.5	185	14	32.5	173.5	132.5
	Ø40	5, 10, 15, 20, 25	466.5	487	270	18	34	310	5	18	65	230	71	40	43	185	12	284	149	126.5
	Ø50	30, 40, 50, 60, 80, 100	510.5	531	300	22	40	360	5	25	75	270	83	50	53.5	185	14	32.5	173.5	132.5